



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019



## Test Report

### -Filtering half masks to protect against particles

PERFORMED IN ACCORDANCE WITH:

EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking

**Test Report No.: R20200062**

|  |           |                             |   |
|--|-----------|-----------------------------|---|
| Tested by (name + function + signature)....:   | Alex He   | Test Engineer               |  |
| Approved by (name + function + signature)....: | Dyne Wang | Laboratory Manager          |  |
| Date of issue :                                |           | Jun 15 <sup>th</sup> , 2020 |   |

**Project No.:** P20200085

**Testing Laboratory** .....: Trust Right Testing and Certification Service (Zhongshan) Ltd.

Address .....: No.28, Shangjian Road, Nantou Town, Zhongshan Guangdong

**Testing Location** .....: Trust Right Testing and Certification Service (Zhongshan) Ltd.

Address .....: No.28, Shangjian Road, Nantou Town, Zhongshan Guangdong

**Applicant's name** .....: UNIVERSAL CERTIFICATION and SURVEILLANCE SERVICES Trade Co.

Address .....

**Manufacturer's name** .....: JIANGMEN YANYANG TRADING CO.,LTD

Address .....: NO.1, 4THFLOOR, BUILDING2, NO.18XINYIROAD, JIANGHAI DISTRICT, JIANGMENCITY, GUANGDONGPROVINCE, CHINA

**Factory's name** .....: Same as manufacturer

Address .....: Same as manufacturer

**Test item description:** Filtering half mask

Trade Mark .....: N/A

Model/Type reference.....: YY0525

Grade.....: FFP2

Country of destination (code) .....: N/A

**Sample**

Samples received on .....: Jun 5<sup>th</sup>, 2020

Reference samples.....: S202000YY

Samples tested on.....: Jun 5<sup>th</sup>, 2020 – Jun 15<sup>th</sup>, 2020

**Result** ..... : The test items PASSED/~~FAILED~~ partially the test specification(s).  
 For detailed testing of items, please refer to the report and testing data.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Trust Right Testing and Certification Service (Zhongshan) Ltd. is acknowledged as copyright owner and source of the material. Trust Right Testing and Certification Service (Zhongshan) Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. The results referred in this report are only relevant to the samples tested and described in this report.



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
Tel: 0760-86117019

## Test Report

| RELEASE CONTROL RECORD |                  |               |
|------------------------|------------------|---------------|
| TEST REPORT NUMBER     | REASON OF CHANGE | DATE OF ISSUE |
|                        |                  |               |
|                        |                  |               |
|                        |                  |               |



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
Tel: 0760-86117019

## Test Report

### GENERAL DESCRIPTION OF THE APPLIANCE

#### 1, Description of the appliances

|                     |                     |
|---------------------|---------------------|
| Product description | Filtering half mask |
| Product name        | Filtering half mask |
| Model               | YY0525              |
| Classification      | FFP2                |




TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
Tel: 0760-86117019

# Test Report

## PICTURES

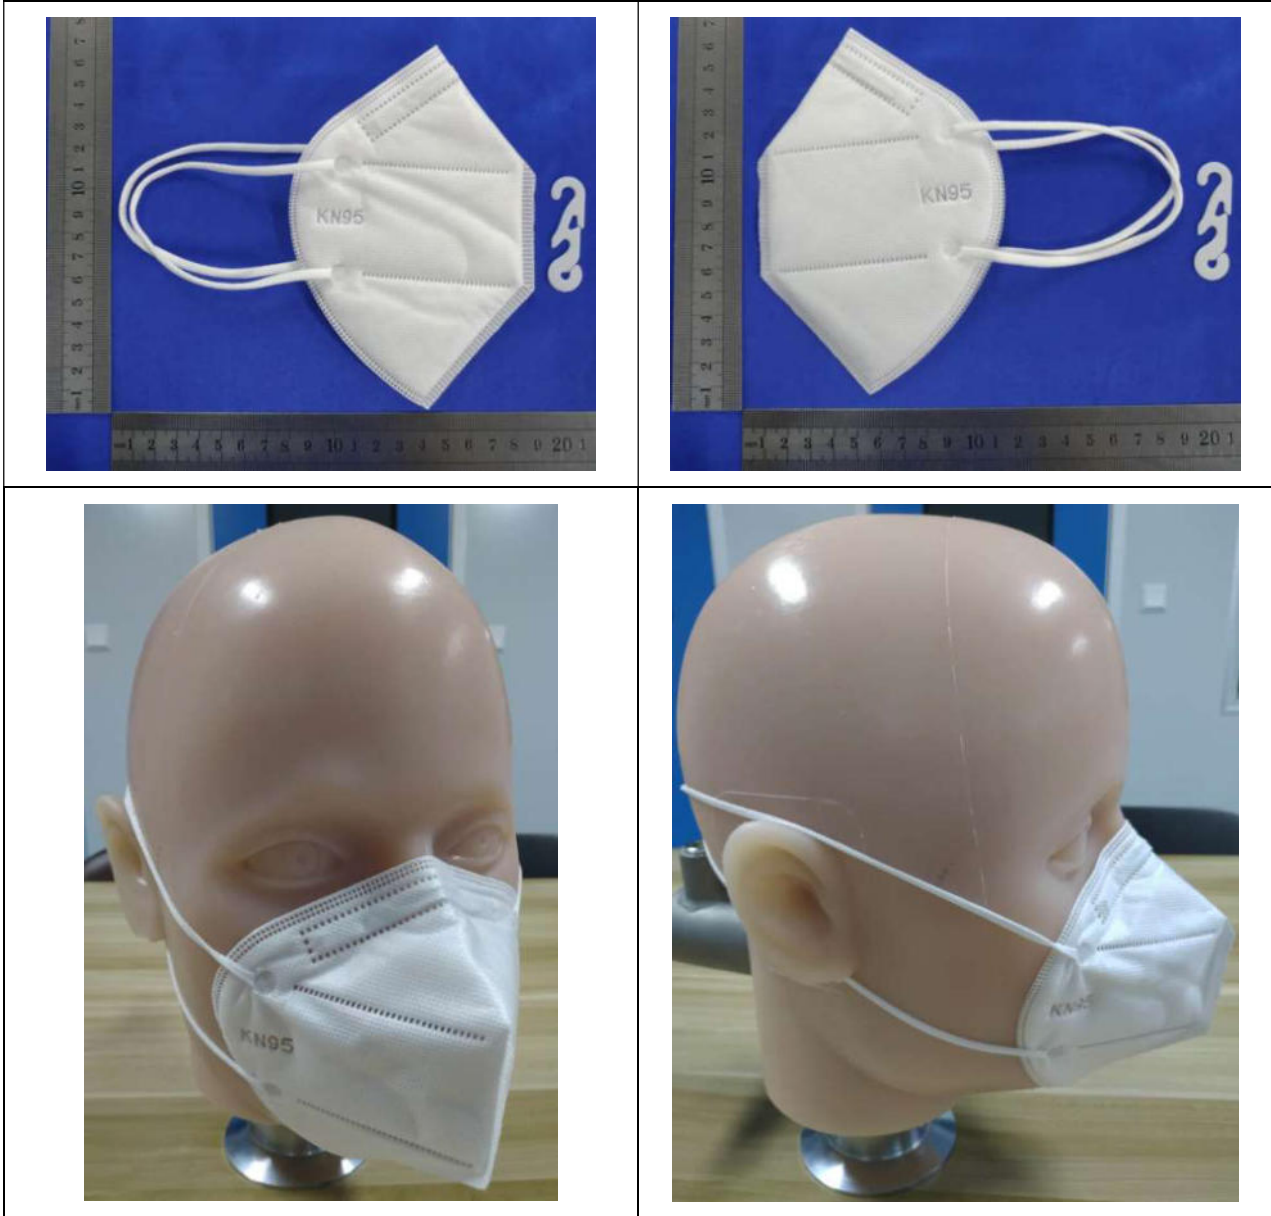

### PRINCIPALS COMPONENTS

| COMPONENT | MANUFACTURER | MODEL | Certificate/report |
|-----------|--------------|-------|--------------------|
|           |              |       |                    |



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

### Evaluation according to the test specification (standard)

**Abbreviations of the verdict:**

|               |          |                       |
|---------------|----------|-----------------------|
| <b>P(ass)</b> | <b>=</b> | <b>passed</b>         |
| <b>F(ail)</b> | <b>=</b> | <b>failed</b>         |
| <b>N/A</b>    | <b>=</b> | <b>not applicable</b> |
| <b>N/T</b>    | <b>=</b> | <b>not tested</b>     |

EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking

| Clause | Requirements  | Result/Comment                 | Verdict |
|--------|---|--------------------------------|---------|
| 1      | Scope   |                                |         |
| 2      | Normative references  |                                |         |
| 3      | Terms and definitions   |                                |         |
| 4      | Description   |                                |         |
| 5      | Classification  |                                |         |
|        | Particle filtering half masks are classified according to their filtering efficiency and their maximum total inward leakage. There are three classes of devices:  |                                | P       |
|        | - FFP1  |                                | N/A     |
|        | - FFP2  | Designation is Grade FFP2.     | P       |
|        | - FFP3  |                                | N/A     |
| 6      | Designation   |                                | P       |
|        | Particle filtering half masks meeting the requirements of this European Standard shall be designated in the following manner:   |                                |         |
| 7      | Requirements  |                                | P       |
| 7.1    | General   |                                | P       |
|        | All test all test samples shall meet the requirements.  |                                | P       |
| 7.2    | Nominal values and tolerances   |                                | P       |
|        | Except for temperature limits, values which are not stated as maxima or minima shall be subject to a tolerance of $\pm 5\%$ .<br>Unless otherwise specified, the ambient temperature for testing shall be $(16-32)^{\circ} \text{C}$ , and the temperature limits shall be subject to an accuracy of $\pm 1^{\circ} \text{C}$ |                                | P       |
| 7.3    | Visual inspection   |                                | P       |
|        | The visual inspection shall also include the marking and the information supplied by the manufacturer.  | In accordance with requirement | P       |



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

|     |  |  |     |
|-----|--|--|-----|
| 7.4 | Packaging  |  | P   |
|     | Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.   | In accordance with requirement   | P   |
| 7.5 | Material   |  | P   |
|     | Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.<br>After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps. Three particle filtering half masks shall be tested. When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse. Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer. | No mechanical failure after undergoing the conditioning described in 8.3.1. No collapse when conditioned in accordance with 8.3.1 and 8.3.2. | P   |
| 7.6 | Cleaning and disinfecting  | Single shift use only.   | N/A |
| 7.7 | Practical performance  |  | P   |
|     | The particle filtering half mask shall undergo practical performance tests under realistic conditions. These general tests serve the purpose of checking the equipment for imperfections that cannot be determined by the tests described elsewhere in this standard. Where practical performance tests show the apparatus has imperfections related to wearer's acceptance, the test house shall provide full details of those parts of the practical performance tests which revealed these imperfections.   | No imperfections.  | P   |
| 7.8 | Finish of parts  |  | P   |
|     | Parts of the devices likely come into contact with the wearer shall have no sharp edges or burrs.  | No sharp edges or burrs.   | P   |



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

| 7.9            | Leakage  |   | P                                       |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
|----------------|--|---|---|--|-------------------------------|----------------------------|--|---|---|--|------|------|------|----|----|------|---|---|------|---|---|--------------------------------|---|
| 7.9.1          | Total inward leakage   |   | P                                       |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
|                | <p>The laboratory tests shall indicate that the particle filtering half mask can be used by the wearer to protect with high probability against the potential hazard to be expected.</p> <p>The total inward leakage consists of three components: face seal leakage, exhalation valve leakage (if exhalation valve fitted) and filter penetration.</p> <p>For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than</p> <p style="text-align: center;">25 % for FFP1<br/>11 % for FFP2<br/>5 % for FFP3</p> <p>and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than</p> <p style="text-align: center;">22 % for FFP1<br/>8 % for FFP2<br/>2 % for FFP3</p> <p>Testing shall be done in accordance with 8.5.</p>   | <p>Meeting requirement of 11 % for FFP2</p> <p>Meeting requirement of 8 % for FFP2</p> <p>Detail refer to table 1</p> | P                                       |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
| 7.9.2          | Penetration of filter material   |   | P                                       |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
|                | <p>The penetration of the filter of the particle filtering half mask shall meet the requirements of Table 1.</p> <p style="text-align: center;">Table 1 — Penetration of filter material</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Classification</th> <th colspan="2">Maximum penetration of test aerosol (%)</th> </tr> <tr> <th>Sodium chloride test 95 l/min</th> <th>Paraffin oil test 95 l/min</th> </tr> <tr> <td></td> <td style="text-align: center;">%</td> <td style="text-align: center;">%</td> </tr> <tr> <td></td> <td style="text-align: center;">max.</td> <td style="text-align: center;">max.</td> </tr> </thead> <tbody> <tr> <td>FFP1</td> <td style="text-align: center;">20</td> <td style="text-align: center;">20</td> </tr> <tr> <td>FFP2</td> <td style="text-align: center;">6</td> <td style="text-align: center;">6</td> </tr> <tr> <td>FFP3</td> <td style="text-align: center;">1</td> <td style="text-align: center;">1</td> </tr> </tbody> </table> <p>A total of 9 samples of particle filtering half masks shall be tested for each aerosol.</p> | Classification  | Maximum penetration of test aerosol (%) |  | Sodium chloride test 95 l/min | Paraffin oil test 95 l/min |  | % | % |  | max. | max. | FFP1 | 20 | 20 | FFP2 | 6 | 6 | FFP3 | 1 | 1 | <p>Detail refer to table 2</p> | P |
| Classification | Maximum penetration of test aerosol (%)  |   |   |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
|                | Sodium chloride test 95 l/min  | Paraffin oil test 95 l/min  |   |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
|                | %  | %   |   |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
|                | max.   | max.  |   |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
| FFP1           | 20   | 20  |   |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
| FFP2           | 6  | 6   |   |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
| FFP3           | 1  | 1   |   |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
| 7.10           | Compatibility with skin  |   | P                                       |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
|                | <p>Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.</p>  | <p>No irritation or any other adverse effect to health.</p>   | P                                       |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
| 7.11           | Flammability   |   | P                                       |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |
|                | <p>The material used shall not present a danger for the wearer and shall not be of highly flammable nature.</p>  | <p>Detail refer to table 3</p>  | P                                       |  |                               |                            |  |   |   |  |      |      |      |    |    |      |   |   |      |   |   |                                |   |



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

| 7.12           | Carbon dioxide content of the inhalation air  |                                 | P                                   |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
|----------------|---|---------------------------------|-------------------------------------|--|--|------------|--|------------|----------|----------|-----------|------|-----|-----|-----|------|-----|-----|-----|------|-----|-----|-----|-------------------------|---|
|                | The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0% (by volume).  | Detail refer to table 4         | P                                   |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| 7.13           | Head harness  |                                 | P                                   |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
|                | Head harness shall be designed can be donned and removed easily and adjustable or self-adjusting and sufficiently robust to hold the particle.  |                                 | P                                   |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| 7.14           | Field of vision   |                                 | P                                   |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
|                | Field of vision is acceptable in practical performance tests.   |                                 | P                                   |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| 7.15           | Exhalation valve(s)   |                                 |                                     |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
|                | <p>A particle filtering half mask may have one or more exhalation valve(s) and shall function correctly in all orientations.</p> <p>If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.</p> <p>Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.</p> <p>When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10 s.</p>   | No exhalation valve             | N/A                                 |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| 7.16           | Breathing resistance  |                                 | P                                   |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
|                | <p>The breathing resistances apply to valved and valveless particle filtering half mask and shall meet the requirements of table 2.</p> <p style="text-align: center;"><b>Table 2 — Breathing resistance</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="3">Classification</th> <th colspan="3">Maximum permitted resistance (mbar)</th> </tr> <tr> <th colspan="2">inhalation</th> <th>exhalation</th> </tr> <tr> <th>30 l/min</th> <th>95 l/min</th> <th>160 l/min</th> </tr> </thead> <tbody> <tr> <td>FFP1</td> <td>0,6</td> <td>2,1</td> <td>3,0</td> </tr> <tr> <td>FFP2</td> <td>0,7</td> <td>2,4</td> <td>3,0</td> </tr> <tr> <td>FFP3</td> <td>1,0</td> <td>3,0</td> <td>3,0</td> </tr> </tbody> </table> | Classification                  | Maximum permitted resistance (mbar) |  |  | inhalation |  | exhalation | 30 l/min | 95 l/min | 160 l/min | FFP1 | 0,6 | 2,1 | 3,0 | FFP2 | 0,7 | 2,4 | 3,0 | FFP3 | 1,0 | 3,0 | 3,0 | Detail refer to table 5 | P |
| Classification | Maximum permitted resistance (mbar)   |                                 |                                     |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
|                | inhalation  |                                 | exhalation                          |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
|                | 30 l/min  | 95 l/min                        | 160 l/min                           |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| FFP1           | 0,6   | 2,1                             | 3,0                                 |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| FFP2           | 0,7   | 2,4                             | 3,0                                 |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| FFP3           | 1,0   | 3,0                             | 3,0                                 |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| 7.17           | Clogging  |                                 | N/A                                 |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| 7.18           | Demount-able parts  | Earloops with adjustable device | P                                   |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| 8              | Testing   |                                 |                                     |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |
| 9              | Marking   |                                 |                                     |  |  |            |  |            |          |          |           |      |     |     |     |      |     |     |     |      |     |     |     |                         |   |





TL-861

Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

|       |   |                                |     |
|-------|---|--------------------------------|-----|
| 9.1   | Packaging   |                                |     |
|       | The following information shall be clearly and durably marked on the smallest commercially available packaging or legible through it if the packaging is transparent.   |                                |     |
| 9.1.1 | The name, trademark or other means of identification of the manufacturer or supplier.   | Not provided by the applicant; | N/T |
| 9.1.2 | Type-identifying marking.   | Not provided by the applicant; | N/T |
| 9.1.3 | Classification: FFP1, FFP2, FFP3.<br>"NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D | Not provided by the applicant; | N/T |
| 9.1.4 | The number and year of publication of this European Standard.   | Not provided by the applicant; | N/T |
| 9.1.5 | At least the year of end of shelf life.   | Not provided by the applicant; | N/T |
| 9.1.6 | The sentence 'see information supplied by the manufacturer', at least in the official language(s) of the country of destination, or by using the pictogram as shown in Figure 12b.                              | Not provided by the applicant; | N/T |
| 9.1.7 | The manufacturer's recommended conditions of storage (at least the temperature and humidity) or equivalent pictogram, as shown in Figures 12c and 12d.  | Not provided by the applicant; | N/T |
| 9.1.8 | The packaging of those particle filtering half masks passing the dolomite clogging test shall be additionally marked with the letter "D".   | Not provided by the applicant; | N/A |
| 9.2   | Particle filtering half mask  |                                |     |
|       | Particle filtering half masks complying with this European Standard shall be clearly and durably marked with the following:   |                                |     |
| 9.2.1 | The name, trademark or other means of identification of the manufacturer or supplier.   | Not provided by the applicant; | N/T |
| 9.2.2 | Type-identifying marking.   | Not provided by the applicant; | N/T |
| 9.2.3 | The number and year of publication of this European Standard.   | Not provided by the applicant; | N/T |
| 9.2.4 | The symbols FFP1, FFP2 or FFP3 according to class.  | Not provided by the applicant; | N/T |
| 9.2.5 | If appropriate the letter D (dolomite) in accordance with clogging performance. This letter shall follow the class designation (see 9.2.4).   | Not provided by the applicant; | N/A |
| 9.2.6 | Sub-assemblies and components with considerable bearing on safety shall be marked so that they can be identified.   | Not provided by the applicant; | N/A |
| 10    | Information to be supplied by the manufacturer  |                                |     |



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

|      |  |                                |     |
|------|--|--------------------------------|-----|
| 10.1 | Information supplied by the manufacturer shall accompany every smallest commercial available package   | Not provided by the applicant; | N/T |
| 10.2 | Information supplied by the manufacturer shall be at least in the official language(s) of the country of destination   | Not provided by the applicant; | N/T |
| 10.3 | The information supplied by the manufacturer shall contain all information necessary for trained and qualified persons on  | Not provided by the applicant; | N/T |
|      | <ul style="list-style-type: none"> <li>- application/limitations</li> <li>- the meaning of any colour coding</li> <li>- checks prior to use</li> <li>- donning, fitting</li> <li>- use</li> <li>- maintenance (e.g. cleaning, disinfecting), if applicable</li> <li>- storage</li> <li>- the meaning of any symbols/pictograms used</li> </ul>   | Not provided by the applicant; | N/T |
| 10.4 | The information shall be clear and comprehensible. If helpful, illustrations, part numbers, marking shall be added.  | Not provided by the applicant; | N/T |
| 10.5 | <p>Warning shall be given against problems likely to be encountered, for example:</p> <ul style="list-style-type: none"> <li>- fit of particle filtering half mask (check prior to use)</li> <li>- it is unlikely that the requirements for leakage will be achieved if facial hair passes under the face seal</li> <li>- air quality (contaminants, oxygen deficiency)</li> <li>- use of equipment in explosive atmosphere</li> </ul> | Not provided by the applicant; | N/T |
| 10.6 | The information shall provide recommendations as to when the particle filtering half mask shall be discarded.  | Not provided by the applicant; | N/T |
| 10.7 | For devices marked "NR", a warning shall be given that the particle filtering half mask shall not be used for more than one shift.   | Not provided by the applicant; | N/T |



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

### TEST DATA

**Table 1 – 7.9.1 Total inward leakage**

| Model          | YY0525  |        |        |  |        |         |
|----------------|---|--------|--------|--|--------|---------|
| Classification | FFP2  |        |        |  |        |         |
| Exercises      | E1 (%)  | E2 (%) | E3 (%) | E4 (%)   | E5 (%) | TIL (%) |
| A.R.           | 8.7   | 8.7    | 8.6    | 6.7  | 8.9    | 8.3     |
|                | 7.0   | 7.5    | 6.8    | 8.6  | 8.2    | 7.6     |
|                | 7.5   | 6.8    | 7.3    | 6.9  | 7.1    | 7.1     |
|                | 8.0   | 7.8    | 7.6    | 7.0  | 8.0    | 7.7     |
|                | 8.9   | 7.6    | 7.6    | 7.4  | 7.5    | 7.8     |
| T.C.           | 8.5   | 7.3    | 7.2    | 7.5  | 7.9    | 7.7     |
|                | 7.5   | 8.1    | 6.8    | 7.7  | 6.9    | 7.4     |
|                | 8.6   | 6.8    | 7.0    | 7.6  | 8.1    | 7.6     |
|                | 7.1   | 8.4    | 6.7    | 7.4  | 7.8    | 7.5     |
|                | 8.0   | 7.8    | 7.7    | 8.1  | 7.0    | 7.7     |
| Requirement    | For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than |        |        | at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than |        |         |
|                | 25 % for FFP1<br>11 % for FFP2<br>5 % for FFP3  |        |        | 22 % for FFP1<br>8 % for FFP2<br>2 % for FFP3  |        |         |
| Result         | P   |        |        | P  |        |         |

| Testing Subject<br>Family name of<br>volunteer | Face Length<br>(mm) | Face Width<br>(mm) | Face Depth<br>(mm) | Mouth Width<br>(mm) |
|--|---------------------|--------------------|--------------------|---------------------|
| Luo  | 128                 | 149                | 116                | 54                  |
| Yuan   | 107                 | 125                | 110                | 52                  |
| Liang  | 119                 | 147                | 115                | 58                  |
| Chen   | 124                 | 135                | 110                | 49                  |
| Yang   | 115                 | 127                | 124                | 53                  |
| Chen   | 115                 | 139                | 119                | 55                  |
| Zeng   | 109                 | 123                | 115                | 52                  |
| Lai  | 118                 | 135                | 117                | 55                  |
| Jiang  | 119                 | 126                | 116                | 59                  |
| Feng   | 120                 | 145                | 119                | 54                  |



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
 Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
 Tel: 0760-86117019

## Test Report

**Table 2 – 7.9.2 Penetration of filter material**

|                          |                 |      |           |              |      |           |
|--------------------------|-----------------|------|-----------|--------------|------|-----------|
| Model                    | YY0525          |      |           |              |      |           |
| Classification           | FFP2            |      |           |              |      |           |
| Test flow rate (l/min)   | 95              |      |           |              |      |           |
| Test aerosol             | Sodium chloride |      |           | Paraffin oil |      |           |
| Sample performed         | A.R.            | S.W. | M.S.+T.C. | A.R.         | S.W. | M.S.+T.C. |
| Measured Penetration (%) | 1.4             | 1.3  | 1.6       | 3.0          | 3.5  | 4.7       |
|                          | 1.3             | 1.3  | 1.6       | 3.4          | 3.5  | 4.1       |
|                          | 1.2             | 1.4  | 1.5       | 3.3          | 3.4  | 4.5       |
| Required (%)             | FFP2: ≤ 6       |      |           | FFP2: ≤ 6    |      |           |
| Result                   | P               | P    | P         | P            | P    | P         |

**Table 3 – 7.11 Flammability**

| Condition   | Result      | Assessment |
|---|-------------|------------|
| As received   | Burn for 1s | P          |
|   | Burn for 1s |            |
| Temperature conditioned   | Burn for 1s |            |
|   | Burn for 2s |            |
| Required: when tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame. |             |            |



TL-861

Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
Tel: 0760-86117019

## Test Report

**Table 4 – 7.12 Carbon dioxide content of the inhalation air**

|                              |  |          |          |
|------------------------------|--|----------|----------|
| Model                        | YY0525   |          |          |
| Samples                      | Sample 1   | Sample 2 | Sample 3 |
| Measured CO <sub>2</sub> (%) | 0.2  | 0.3      | 0.3      |
| Average CO <sub>2</sub> (%)  | 0.3  |          |          |
| Required                     | The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume) |          |          |
| Result                       | P  |          |          |

**Table 5 – 7.16 Breathing resistance**

|   |            |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---|------------|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|   | YY0525     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| A.R   | Flow rate  | 1        |     |     |     |     | 2   |     |     |     |     | 3   |     |     |     |     |     |
|   |            | A        | B   | C   | D   | E   | A   | B   | C   | D   | E   | A   | B   | C   | D   | E   |     |
|   | Inhalation | 30 l/min | 0.3 | 0.4 | 0.3 | 0.3 | 0.3 | 0.2 | 0.4 | 0.2 | 0.2 | 0.3 | 0.3 | 0.2 | 0.2 | 0.2 | 0.3 |
|   |            | 95 l/min | 1.6 | 1.5 | 1.7 | 1.6 | 1.6 | 1.5 | 1.5 | 1.6 | 1.5 | 1.6 | 1.6 | 1.7 | 1.6 | 1.6 | 1.6 |
| Exhalation  | 160 l/min  | 2.2      | 2.2 | 2.1 | 2.1 | 2.1 | 2.2 | 2.2 | 2.1 | 2.1 | 2.2 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 |     |
| S.W.  | Flow rate  | 4        |     |     |     |     | 5   |     |     |     |     | 6   |     |     |     |     |     |
|   |            | A        | B   | C   | D   | E   | A   | B   | C   | D   | E   | A   | B   | C   | D   | E   |     |
|   | Inhalation | 30 l/min | 0.3 | 0.4 | 0.2 | 0.2 | 0.3 | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
|   |            | 95 l/min | 1.5 | 1.7 | 1.5 | 1.6 | 1.6 | 1.5 | 1.5 | 1.6 | 1.6 | 1.5 | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 |
| Exhalation  | 160 l/min  | 2.1      | 2.0 | 2.0 | 2.1 | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 | 2.2 | 2.2 | 2.1 | 2.0 | 2.1 | 2.1 |     |
| T.C.  | Flow rate  | 7        |     |     |     |     | 8   |     |     |     |     | 9   |     |     |     |     |     |
|   |            | A        | B   | C   | D   | E   | A   | B   | C   | D   | E   | A   | B   | C   | D   | E   |     |
|   | Inhalation | 30 l/min | 0.3 | 0.3 | 0.3 | 0.4 | 0.2 | 0.2 | 0.3 | 0.2 | 0.2 | 0.3 | 0.2 | 0.2 | 0.3 | 0.2 | 0.2 |
|   |            | 95 l/min | 1.6 | 1.6 | 1.7 | 1.7 | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 | 1.6 | 1.7 | 1.5 | 1.7 |
| Exhalation  | 160 l/min  | 2.0      | 2.1 | 2.2 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 2.2 | 2.2 | 2.1 | 2.0 | 2.1 | 2.1 | 2.2 |     |
| Result  | P          |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| <p>A: facing directly ahead;<br/>B: facing vertically upwards;<br/>C: facing vertically downwards;<br/>D: lying on the left side;<br/>E: lying on the right side;</p> |            |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |



TL-861



Company: Trust Right Testing and Certification Service (Zhongshan) Ltd.  
Address: No.601, Block 8, Hongji E Valley Industry Center, Nantou Town, Zhongshan City, P.R. China  
Tel: 0760-86117019

## Test Report

### Equipement

#### List of test equipment used:

| Serial No   | Description                               | Model/Trade Mark | Next Calibration Date       |
|-------------|---|------------------|-----------------------------|
| ZSTE-001    | Ambient Barometer                         | DYM3             | 24 <sup>th</sup> Jun. 2021  |
| ZSTE-002    | Ambient temperature and Humidity recorder | Cos-03           | 9 <sup>th</sup> Apr. 2021   |
| ZSTE-009    | Digital Pressure Gauge                    | BG80-B-21F-0N21  | 2 <sup>nd</sup> Apr. 2021   |
| ZSTE-017    | Two Row Stopwatch                         | PC2810           | 6 <sup>th</sup> Apr. 2021   |
| ZSTE-030    | Digital Data Collector                    | 34970A           | 2 <sup>nd</sup> Apr. 2021   |
| ZSTE-030.01 | 20-Channel Armature Multiplexer           | 34901A           | 2 <sup>nd</sup> Apr. 2021   |
| ZSTE-070    | Pull-Push Force tester                    | NK-300           | 3 <sup>rd</sup> Apr. 2021   |
| ZSTE-082    | Digital Vernier Caliper                   | 0-200_0.01mm     | 11 <sup>th</sup> Apr. 2020  |
| ZSTE-083    | Wind Speed Meter                          | Testo416         | 19 <sup>th</sup> Jun. 2020  |
| ZSTE-108    | Electronic Scale                          | JJ224BC          | 29 <sup>th</sup> May. 2020  |
| ZSTE-115    | Graduated Cylinder                        | 100ml            | 28 <sup>th</sup> May. 2024  |
| ZSTE-122    | Beaker                                    | 500ml            | 28 <sup>th</sup> May. 2024  |
| ZSTE-140    | Weight                                    | 1kg              | 19 <sup>th</sup> Jun. 2022  |
| ZSTE-200    | Aerosol generator                         | TDA-5B           | 14 <sup>th</sup> May. 2021  |
| ZSTE-215    | Air quality analyzer                      | M2000            | 24 <sup>th</sup> June. 2021 |
| ZSTE-216    | Air quality analyzer                      | M2000            | 24 <sup>th</sup> June. 2021 |
| TSGK-T-005  | Penetration of Filter Material Tester     | LSK              | 9 <sup>th</sup> Mar. 2021   |
| TSGK-T-056  | Breath Resistance Tester                  | RL 2051C         | 5 <sup>th</sup> May. 2021   |
| TSGK-T-002  | Flammability                              | KP415            | 9 <sup>th</sup> Mar. 2021   |
| TSGK-T-045  | Leakage with Enclosure                    | RL 2001          | 5 <sup>th</sup> May. 2021   |

END TEST REPORT